

Scissor Lift

UpRight



- Working height up to 38ft
- Maneuvers easily with tight inside turning radius
- Electronic motor controller for smooth, quiet operation
- Fully proportional one-hand controls
- Steel deck with slip-resistant surface
- Platform material loading system
- Non-marking tires


X26 X32

X26/X32 scissor lift specifications

	X26N*	X26	X32
max. working height A	32ft.	32ft.	38ft.
max. platform height B	26ft.	26ft.	32ft.
max. drive height	26ft.	26ft.	32ft.
platform capacity (SWL)	750lbs	1000lbs	750lbs
platform size	2ft. 3in x	3ft 8in. x	3ft. 8in. x
- inside with deck extended	10ft. 5in.	10ft. 5in.	10ft. 5in.
width C	32.7in.	48in.	48in.
stowed height D			
- with guardrails lowered	6ft. 9in.	6ft. 9in.	7ft. 4in.
stowed length E	7ft. 7in.	7ft. 7in.	7ft. 7in.
gross weight	5,198lb	4,747lb	5,481lb
drive speed max.	2mph	2mph	2mph
- with platform raised	0.5mph	0.6mph	0.6mph
gradeability	14.5°/25%	12°/22%	12°/22%
inside turning radius	8in.	8in.	8in.
ground clearance	3.5in.	3.5in.	3.5in.
lift speed - raise / lower	42/40sec	45/40sec	65/40sec
drive system	dual front wheel hydraulic motors		
tires	15in. dia. solid rubber, non-marking		
battery charger	25A, 110/220V AC		
parking brake	dual, spring-applied hydraulic release		
control system	one-hand proportional joystick		
power source	24V 4hp DC electric motor 4 x 6V 220 Ah batteries		

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

*X26N: Only available in certain territories - check before ordering



BP1, X26/32 USA 12/06


UpRight 2686 S. Maple Avenue, Fresno, CA 93725
 Tel: +1 (866) 843-3350 (Toll Free) / +1 (559) 443-6600 • Fax: +1 (559) 268-2433
www.upright.com

standard features

- Roll out deck extension
- Proportional controls
- Lift up rear guardrail to ease material loading
- Tilt alarm
- Swing-out service modules
- Crane and forklift points
- Cushion down scissor descent
- Selectable motion alarm
- Non-marking tires
- Quick retract guardrails
- Horn
- Hour meter / low voltage indicator
- 1 year parts and labor warranty
- 5 year structural warranty

options

- Flashing amber beacon
- Air line to platform
- Special paint colours
- Environmental green oil

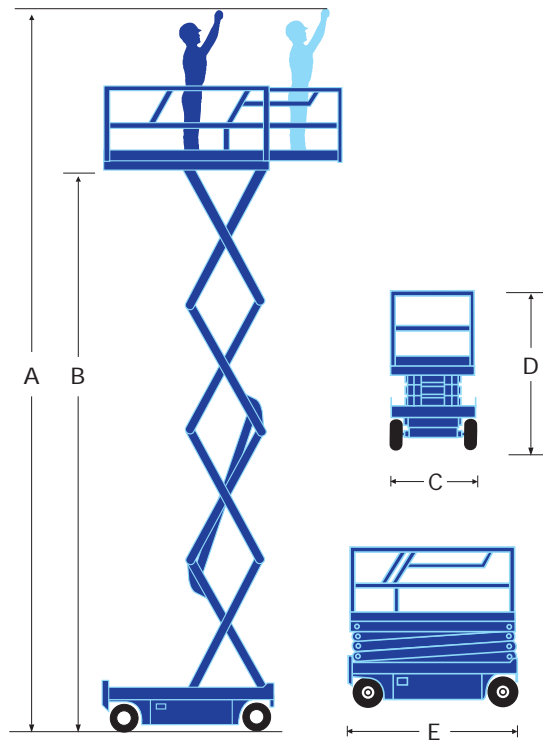

Meets or exceeds applicable requirements of OSHA, ANSI A92.6 and CSA B354.1-04

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight

UpRight